


# Speaker Bracket Instructions

Use these holes to mount the bracket directly to the speaker. Both holes must be used for proper operation.

**NOTE:** If using machine threads in back of speaker, this must be removed.

If your speaker cabinet features a threaded insert, use this one or one of the other included machine screws to attach your speaker.

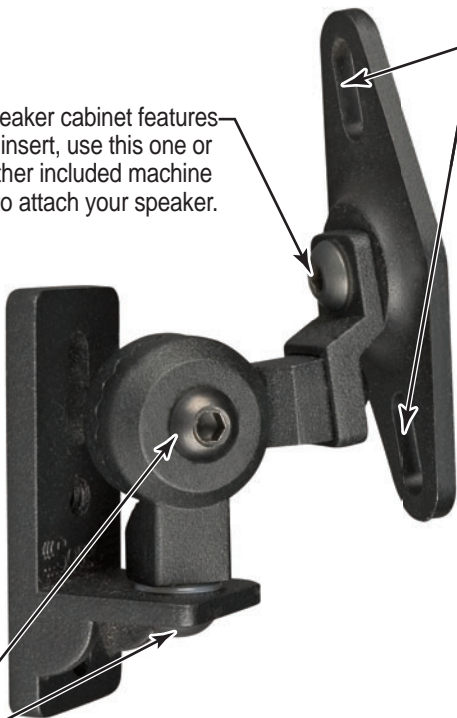

Tighten these swivel points when the desired position is obtained.

**NOTE:** If mounted incorrectly, undue stresses on critical weight-bearing angles can cause failure!